


RP2040

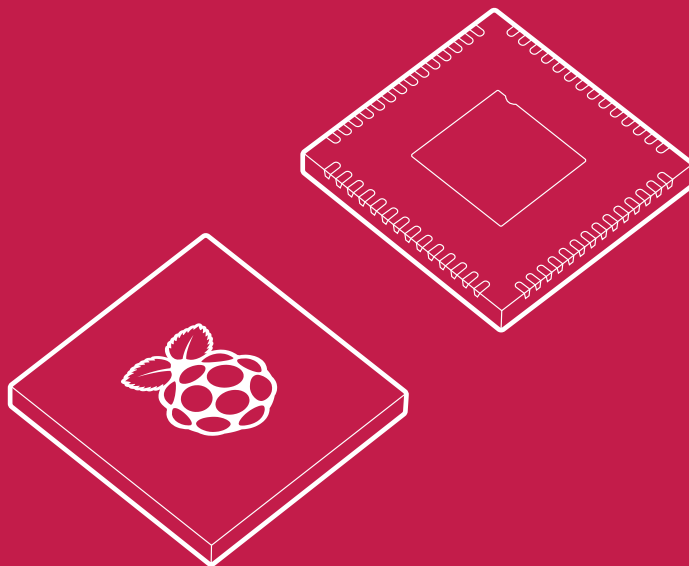

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93


Киргизия (996)312-96-26-47

Россия (495)268-04-70

Казахстан (772)734-952-31

<https://raspberrypi.nt-rt.ru/> || ropy@nt-rt.ru

Overview

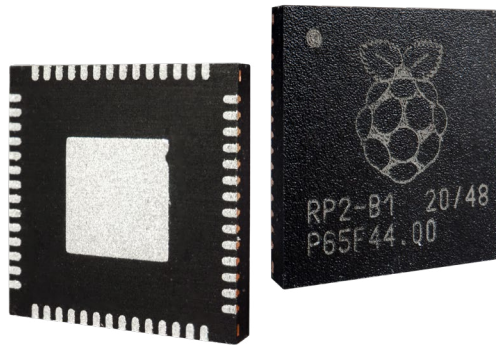

Microcontrollers connect the world of software to the world of hardware. They allow developers to write software that interacts with the physical world in the same deterministic, cycle-accurate manner as digital logic. They occupy the bottom left corner of the price/performance space, outselling more powerful computing devices. They are the workhorses that power the digital transformation of our world.

RP2040 is the debut microcontroller from Raspberry Pi. It brings our signature values of high performance, low cost, and ease of use to the microcontroller space.

With a large on-chip memory, symmetric dual-core processor complex, deterministic bus fabric, and rich peripheral set augmented with our unique Programmable I/O (PIO) subsystem, RP2040 provides professional users with unrivalled power and flexibility. With detailed documentation, a polished MicroPython port, and a UF2 bootloader in ROM, it has the lowest possible barrier to entry for beginner and hobbyist users.

RP2040 is a stateless device, with support for cached execute-in-place from external QSPI memory. This design decision allows you to choose the appropriate density of non-volatile storage for your application, and to benefit from the low pricing of commodity Flash parts.


RP2040 is manufactured on a modern 40 nm process node, delivering high performance, low dynamic power consumption, and low leakage, with a variety of low-power modes to support extended-duration operation on battery power.

Whatever your microcontroller application – from machine learning to motor control, from agriculture to audio – RP2040 has the performance, feature set, and support to make your product fly.

Key features




CPU:	Dual ARM Cortex-M0+ @ 133 MHz
Memory:	264kB on-chip SRAM in six independent banks Support for up to 16MB of off-chip Flash memory via dedicated QSPI bus
Architecture:	DMA controller Fully connected AHB crossbar Interpolator and integer divider peripherals On-chip programmable LDO to generate core voltage Two on-chip PLLs to generate USB and core clocks
Interfacing:	30 GPIO pins, four of which can be used as analogue inputs
Peripherals:	2 × UARTs 2 × SPI controllers 2 × I2C controllers 16 × PWM channels 1 × USB 1.1 controller and PHY, with host and device support 8 × PIO state machines
Package:	7 × 7 mm QFN-56 package
Production lifetime:	RP2040 will remain in production until at least January 2030
Compliance:	RP2040 is compliant to Moisture Sensitivity Level 1. RP2040 is compliant to the requirement of REACH Substances of Very High Concern (SVHC) that ECHA announced on 25 June 2020. RP2040 is compliant to the requirement and standard of Controlled Environment-related Substance of RoHS directive (EU) 2011/65/EU and directive (EU) 2015/863.

Pinout

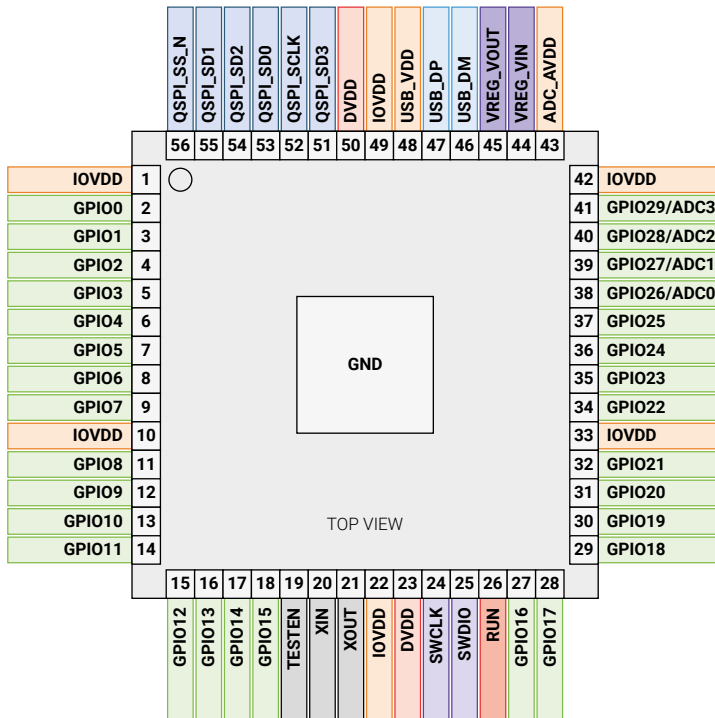

GPIOx	General-purpose digital input and output
GPIOx/ADCy	General-purpose digital input and output, with analogue-to-digital converter function
QSPIx	Interface to an SPI, Dual-SPI or Quad-SPI Flash device, with execute-in-place support
USB_DM and USB_DP	USB controller, supporting full-speed device and full-/low-speed host
XIN and XOUT	Connect a crystal to RP2040's crystal oscillator
RUN	Global asynchronous reset pin; reset when driven low, run when driven high
SWCLK and SWDIO	Access to the internal Serial Wire Debug multi-drop bus; provides debug access to both processors
TESTEN	Factory test mode pin
GND	Single external ground connection, bonded to a number of internal ground pads on the RP2040 die
IOVDD	Power supply for digital GPIOs, nominal voltage 1.8 V to 3.3 V
USB_VDD	Power supply for internal internal USB full-speed PHY, nominal voltage 3.3 V
ADC_AVDD	Power supply for analogue-to-digital converter, nominal voltage 3.3 V
VREG_VIN	Power input for the internal core voltage regulator, nominal voltage 1.8 V to 3.3 V
VREG_VOUT	Power output for the internal core voltage regulator, nominal voltage 1.1 V, 100 mA max current
DVDD	Digital core power supply, nominal voltage 1.1 V

Physical specifications

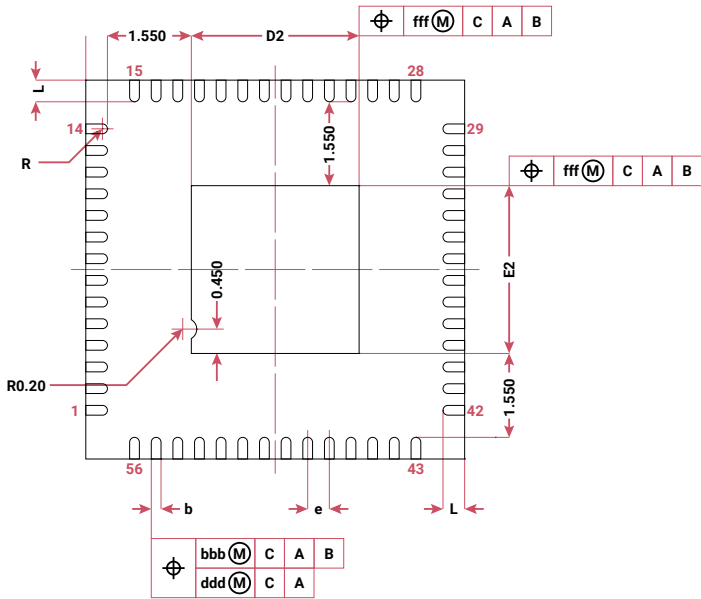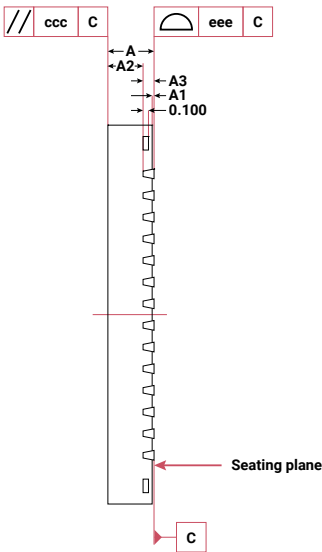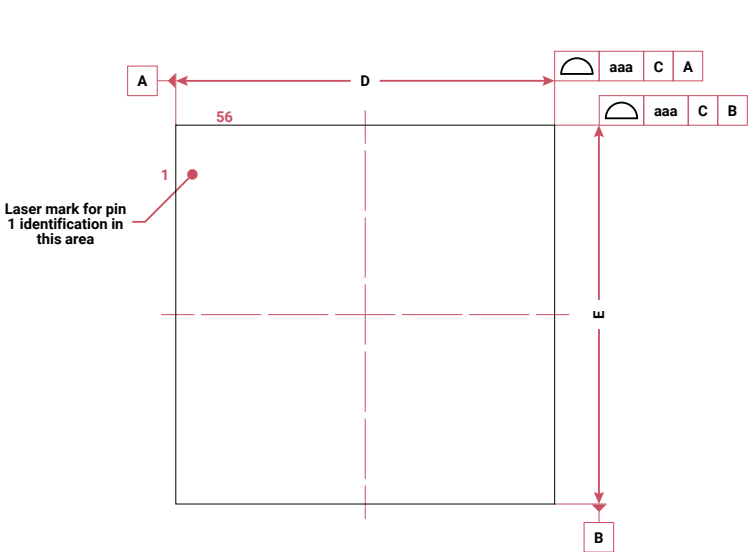


Symbol	Millimetre			Inch		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	-	-	0.900	-	-	0.035
A1	0.000	-	0.050	0.000	-	0.002
A2	-	0.650	0.700	-	0.026	0.028
A3	0.203 REF			0.008 REF		
b	0.130	0.180	0.230	0.005	0.007	0.009
D	7 BSC			0.276 BSC		
D2	3.00	3.100	3.200	0.118	0.122	0.126
E	7 BSC			0.276 BSC		
E2	3.00	3.100	3.200	0.118	0.122	0.126
L	0.300	0.400	0.500	0.012	0.016	0.020
e	0.400 BSC			0.016 BSC		
R	0.065	-	-	0.003	-	-
Tolerances of form and position						
aaa	0.100			0.004		
bbb	0.070			0.003		
ccc	0.100			0.004		
ddd	0.050			0.002		
eee	0.080			0.003		
fff	0.100			0.004		

SAFETY INSTRUCTIONS

To avoid malfunction of or damage to this product, please observe the following:

- Anti-static precautions should be taken when handling, to prevent damage by the discharge of electrical energy
- Do not expose to water or moisture
- Hand creams and lotions containing silicone must not be used, since they can cause solderability and epoxy adhesion problems

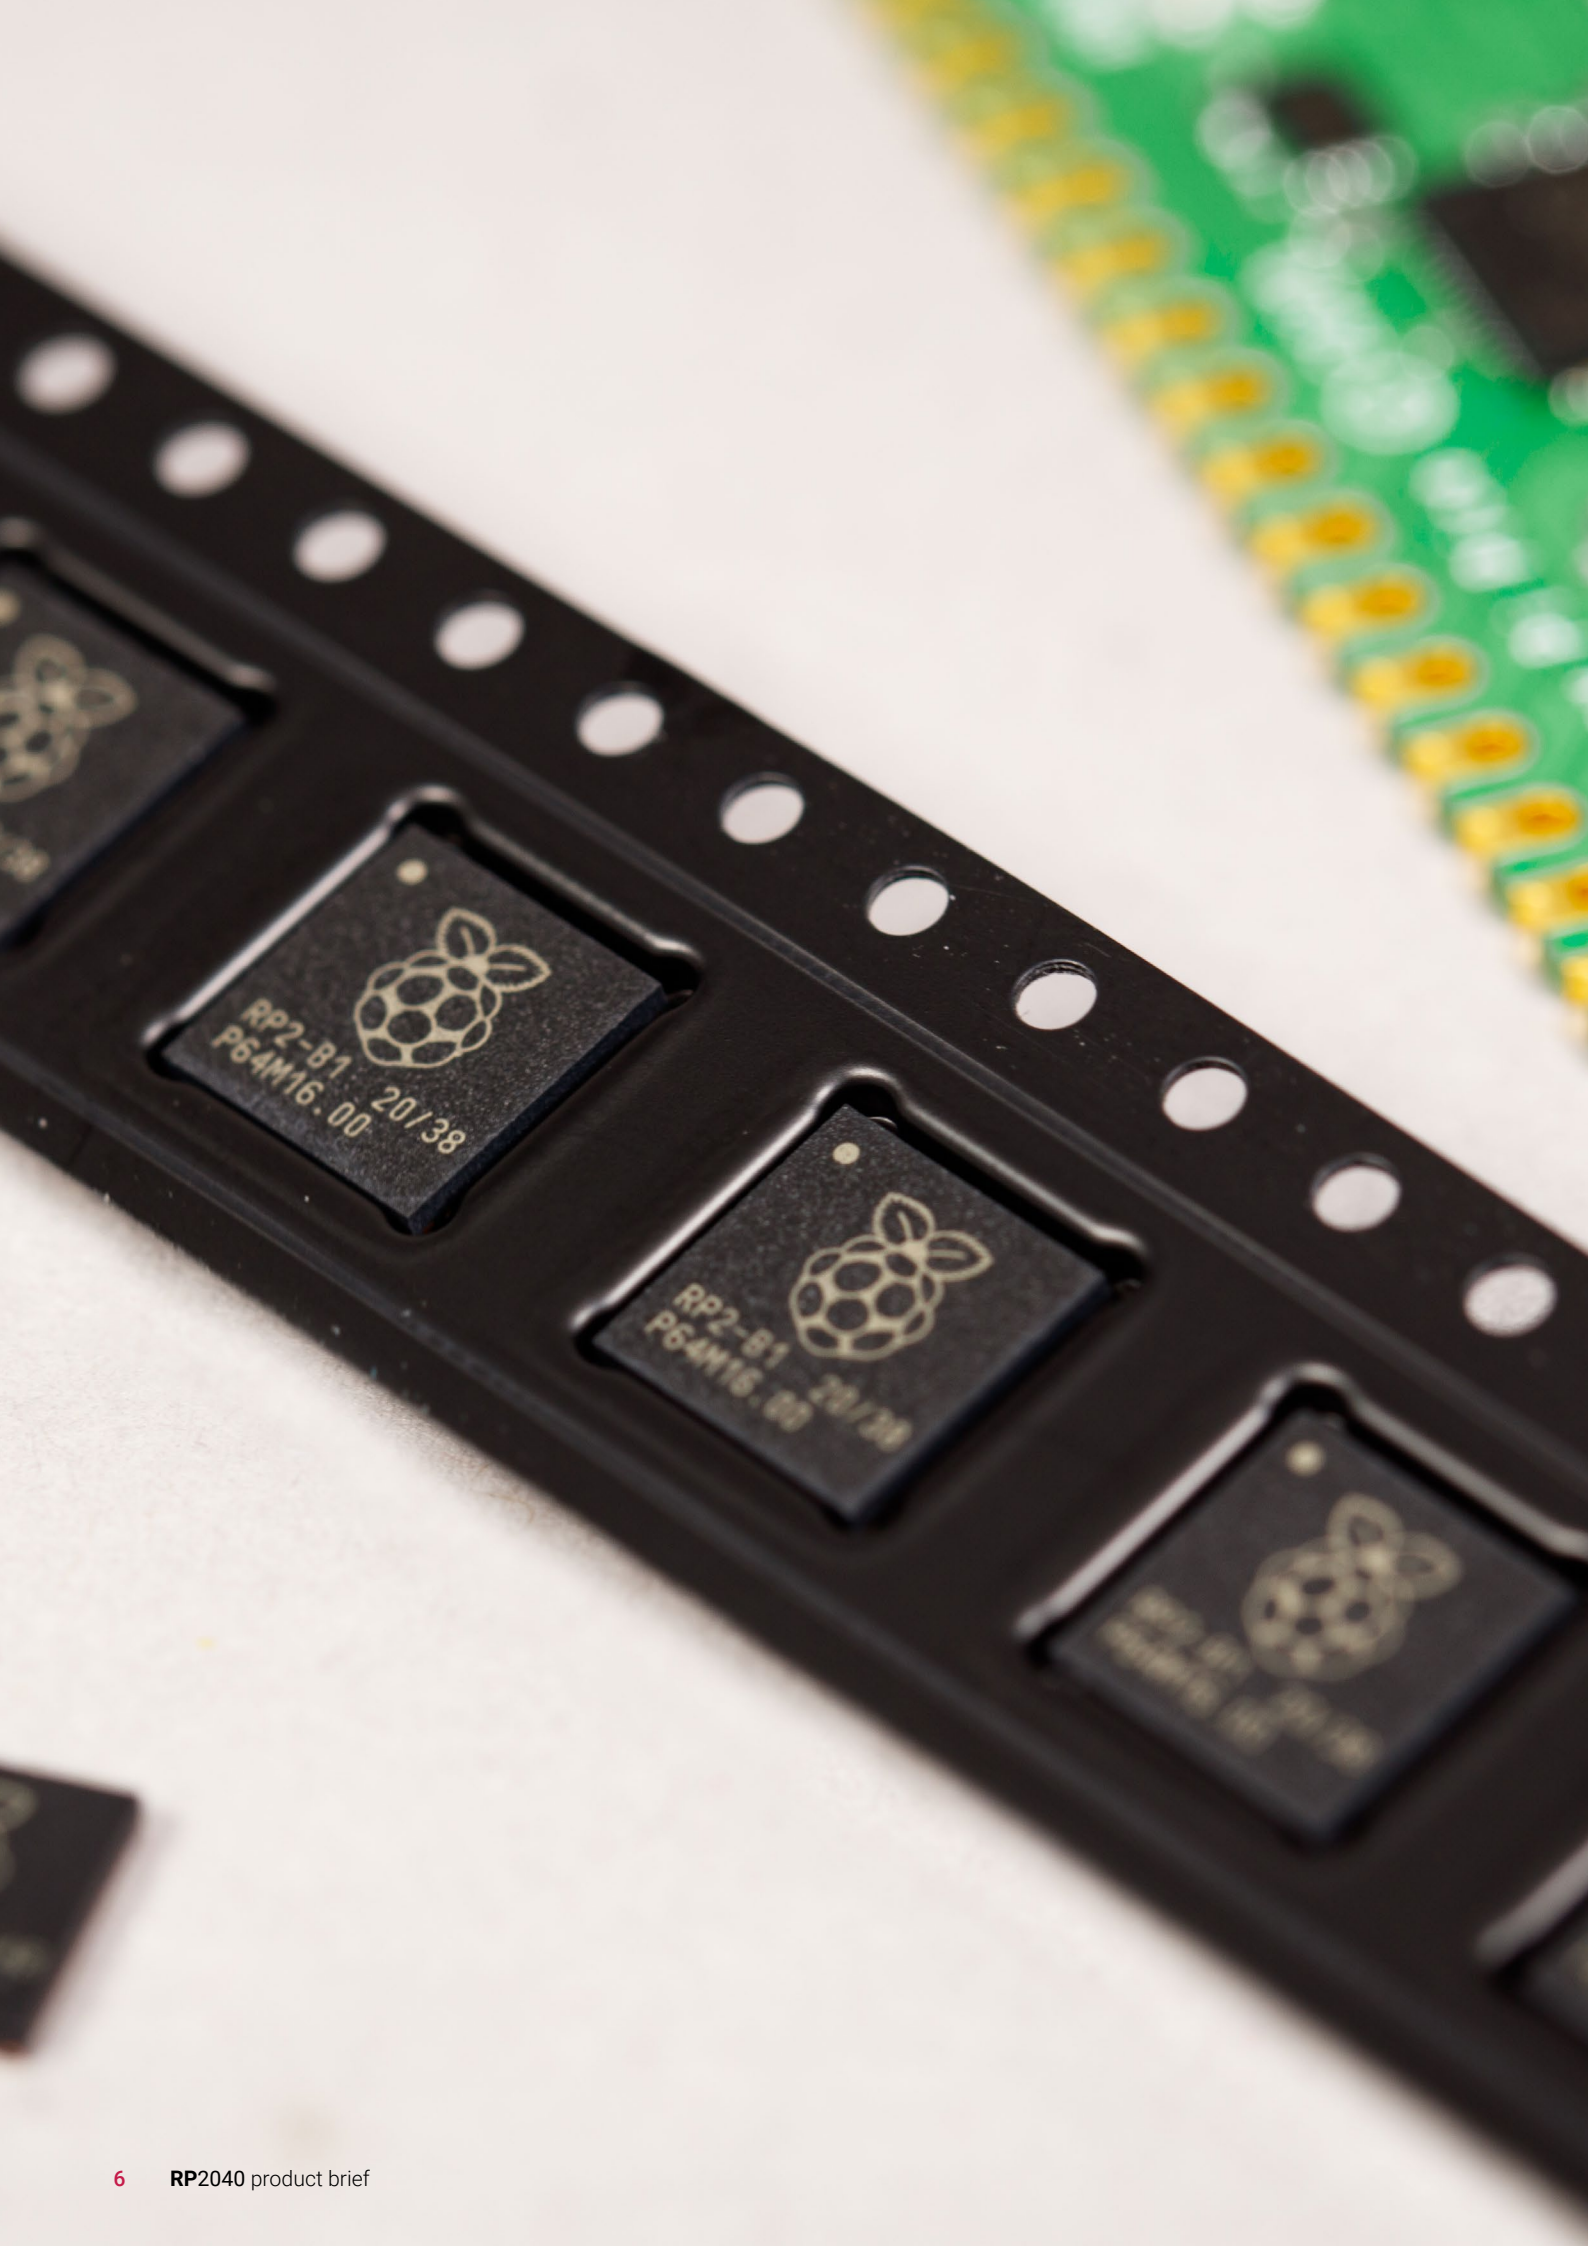

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Волгда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47

Россия (495)268-04-70

Казахстан (772)734-952-31

<https://raspberrypi.nt-rt.ru/> || rpy@nt-rt.ru